
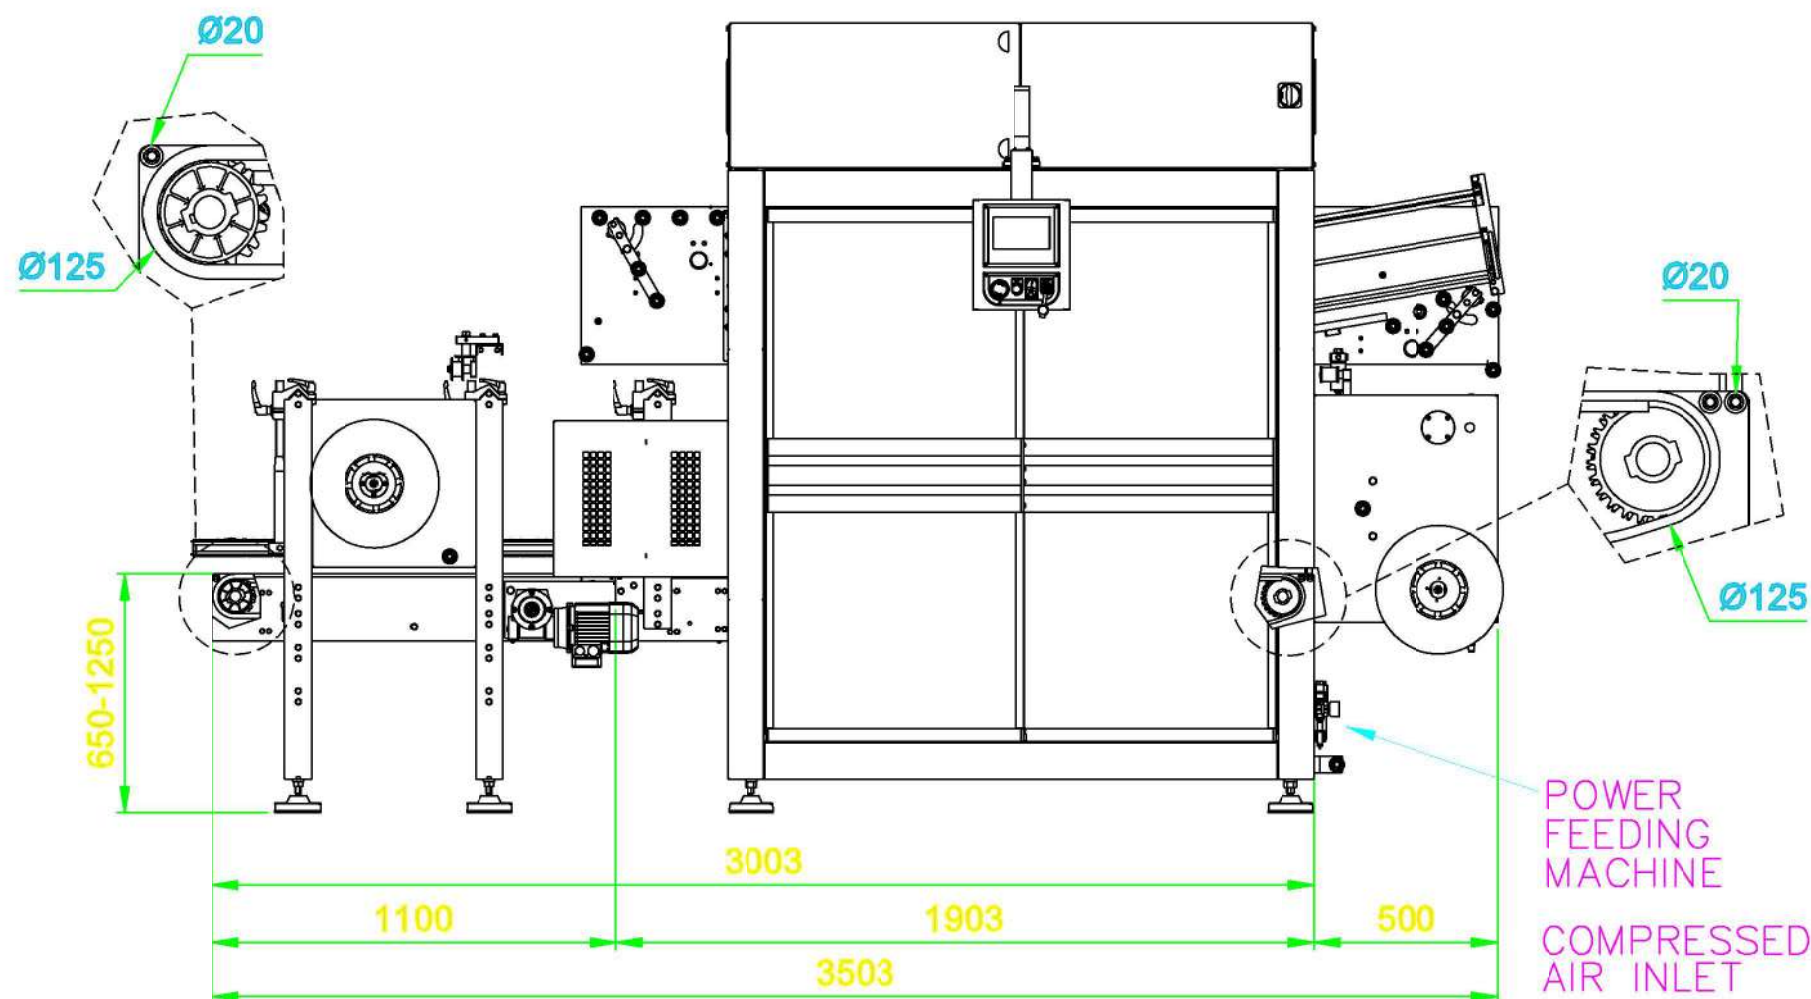


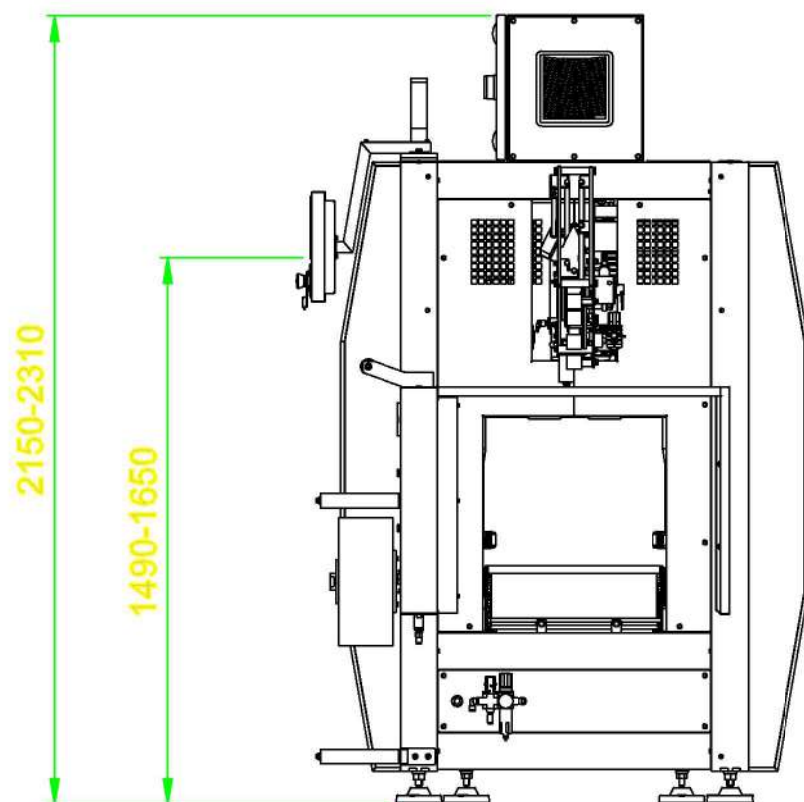



DIGITAL SIGNAL : MACHINE READY				
Signal type	Symbolism	Maximum load	Logic state 0 : (open contact)	Logic state 1 : (closed contact)
Potential free contact		6A , 220 V	Machine in emergency	Machine running or pause or stop
DIGITAL SIGNAL : MACHINE IN EMERGENCY				
Signal type	Symbolism	Maximum load	Logic state 1 : (closed contact)	Logic state 0 : (open contact)
Potential free contact		6A , 220 V	Machine running or pause or stop	Machine in emergency

TECHNICAL SPECIFICATIONS OF PRODUCT

The maximum section of produced passage not workable

The workable maximum format

The workable minimal format

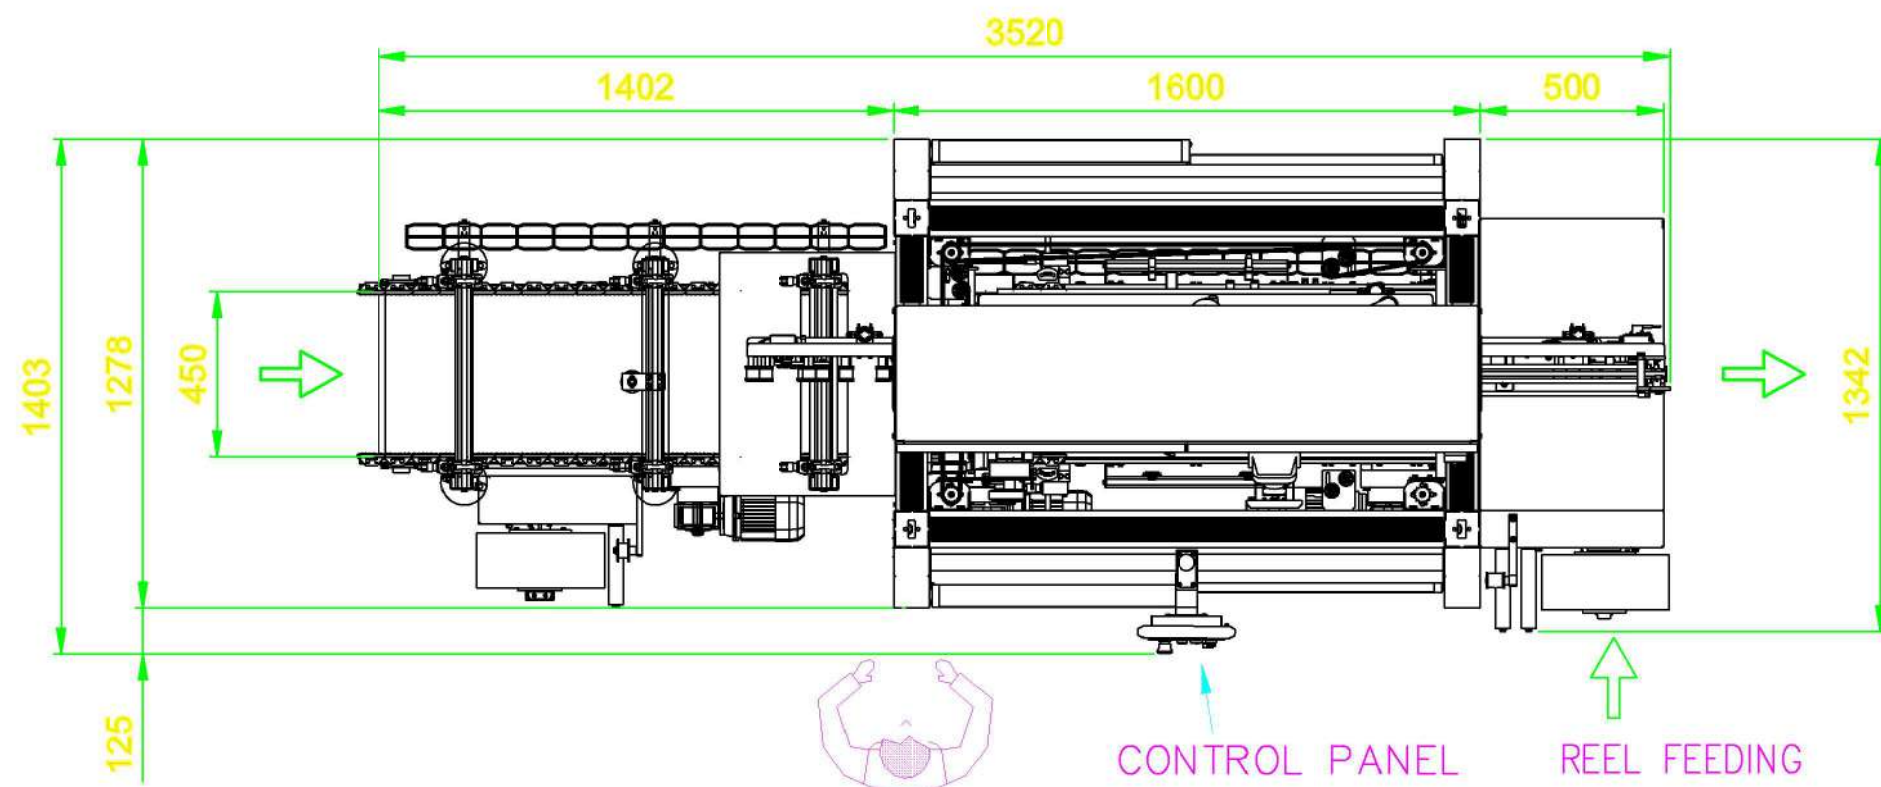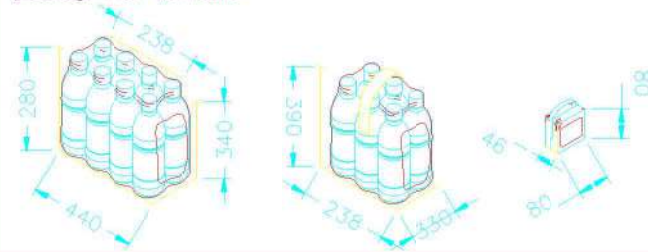

APM80 DX	
TECHNICAL SPECIFICATIONS	
POWER SUPPLY:	380-415V 50-60Hz 3PH+N+PE
MACHINE INSTALLED POWER:	Kw 2.4
COMPRESSED AIR INLET:	6 bar - PIPE CONNECTION: Ø10 - CONSUMPTION: 250 NI/min

PDS.	BBM Line	Rif. Commessa	SCALA 1:
CLIENTE		Linea	DESEGNO U.C.
		Rif. disegno	
PROPRIETÀ RISERVATA. Ne è vietata la riproduzione e l'utilizzo da parte di terzi non autorizzati. ALL RIGHTS RESERVED. It is not permitted to copy or use this form if not authorized. Tous droits de reproduction et d'utilisation RSVY RÉSERVÉ. Pour tous ceux qui ne sont pas autorisés.			